

4K Video Wall Controller


with Multi-Window Display, Image Overlay, Zoom, and Layout

Model:HW40400

Features

- Intuitive Mouse Control for Seamless Multi-View Experience: Overlay, Zoom, and Arrange 4 Signal Sources for a Customized Visual Feast on Your Video Wall.
- Single-Monitor Multi-Window Display: Enhance Productivity and Expand Your Visual Workspace.
- Versatile Video Wall: Seamlessly Switch Between Multi-Source Monitoring and Full-Screen Presentations.
- Break Free from Visual Constraints: Multi-Window, Movable, Resizable, and Layered Windows for Unparalleled Visual Control.
- Interleaved Signal Display: Seamlessly Switch Input Sources to Any Screen.
- Versatile Split-Screen Modes: Adapt Your Meeting Layout to Suit Your Needs.
- Expand Your Monitoring Capabilities with Dual Auxiliary Displays:
- Dual Auxiliary Displays: Expand your visual workspace and monitor multiple sources simultaneously.
- Simultaneous Video Wall and Single-Screen Monitoring: Seamlessly switch between displaying the entire video wall or a single selected computer screen in full-screen mode.
- PANIO's advanced fast-switching technology ensures a seamless visual experience by eliminating black screens during transitions. Enjoy fluid, uninterrupted viewing with this cutting-edge solution.
- Enhanced Edge Processing Technology for Impeccable Visuals.
- Three-set scene storage function, allowing for quick switching to your commonly used display modes.
- Comprehensive Control Solutions: Remote, Panel Buttons, Mouse Screen Switching, Scene Shortcuts, RS-232 Commands.
- CP1000 Remote Control Keypad: Simplified Operation with Single-Button Commands, Compatible with Local Network or RS-232 Interface for Easy and Quick Access
- Stable and flicker-free signal extension with PANIO 4K extender: Tested and verified for reliable signal extension and transmission distances.

Diagram

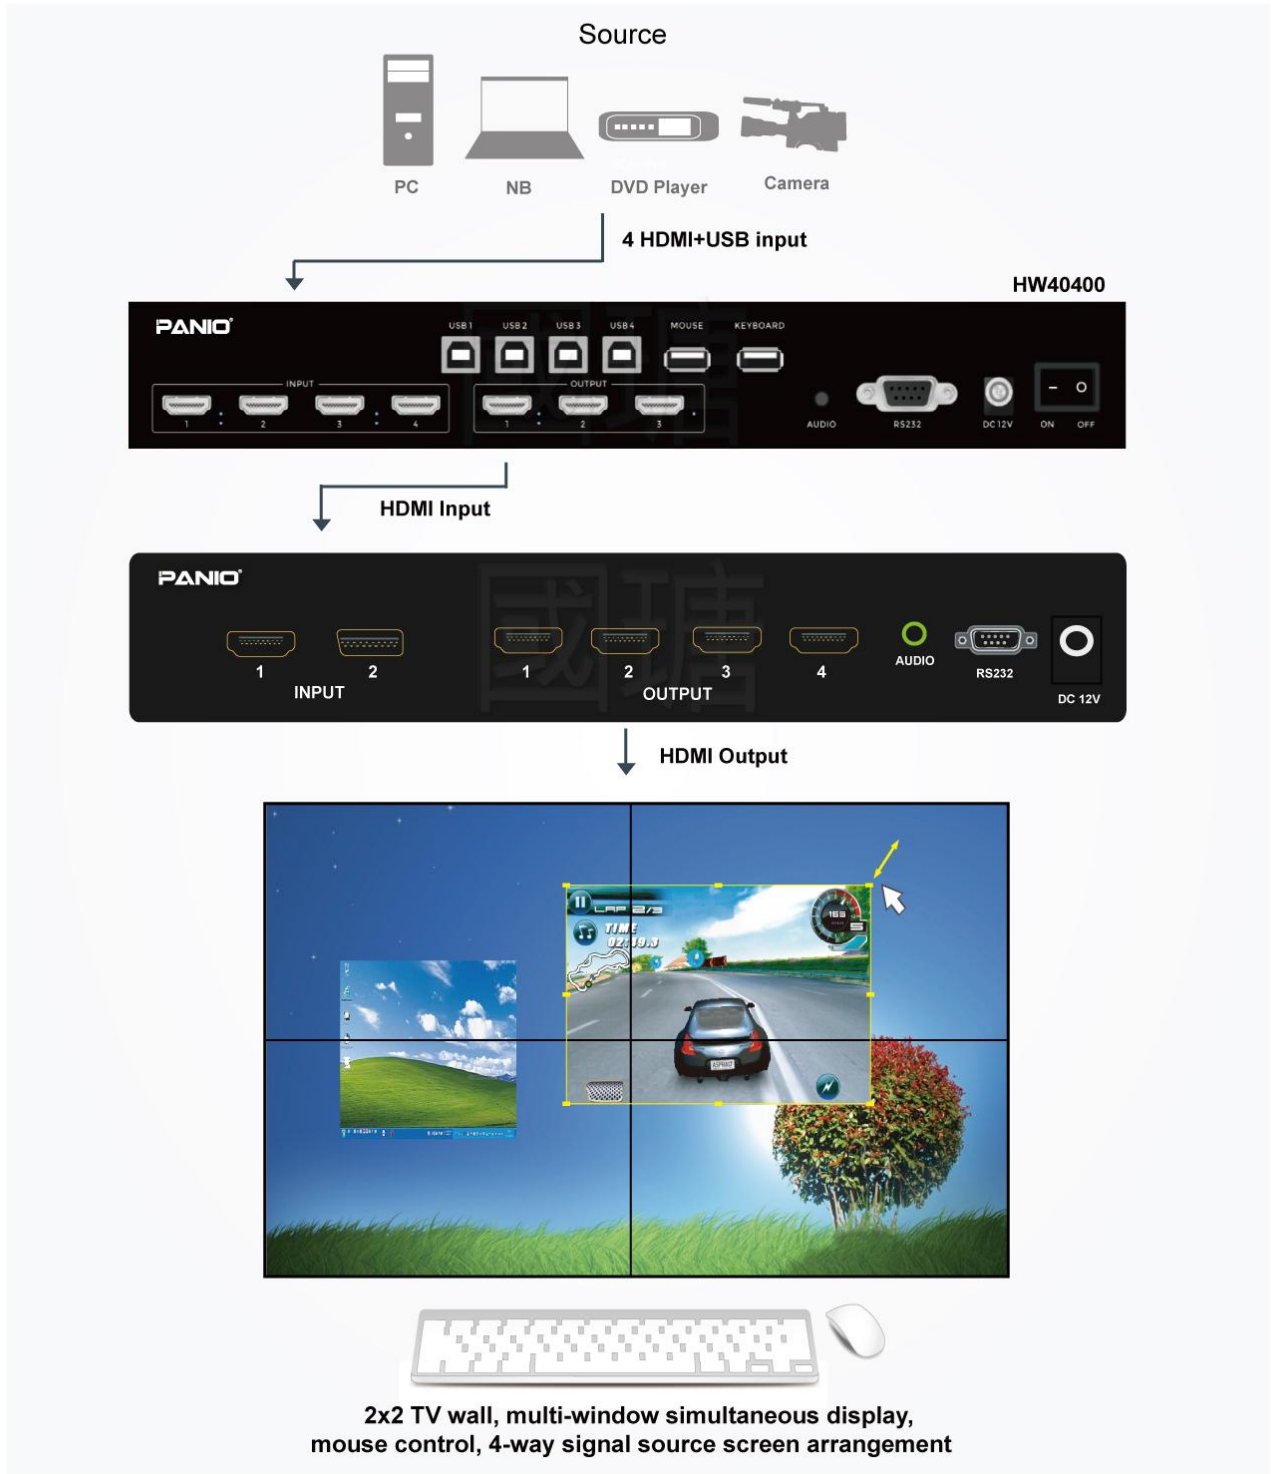

Specification

Model Name	HW40400 Kit
Product Portfolio Content	CQ4310K + HW2250K
Maximum Supported Resolution	Input: 3840x2160 at 60Hz, backward compatible. Output: 3840x2160 at 60Hz, backward compatible.
Video Wall Configuration	2 x 2
Presentation Display Modes	4-way split screen / 3-way split screen / 2-way split screen / 1 large, 1 small picture-in-picture / 1 large, 2 small picture-in-picture / Full screen display

Package Contents

- 1 X HW40400 Kit
- 1 X User manual